

SCiAENGINEER



Installation Guide

Floating License Guide

Contacts	3
Configuring/updating a floating license	5
Step 1 (server): Check if SCIA License Server (FlexNET) is installed	5
Step 2 (server): Open the activation manager and activate the license	5
Step 3 (server): Open FlexNET License Administrator	6
Step 4 (client): The protection setup	7
Step 1. Installation of SCIA License Server (FlexNET)	9
Possible problem	9
Solution	9
Step 2. Using the Activation manager	10
Possible questions/problems	10
License status	11
Blue circle – new license	11
Green circle – working perfectly	11
Grey circle – license is returned	11
Yellow circle – license must be repaired	11
Red Question mark – license files on machine are damaged	12
Messages when using 'Activate license'	12
Step 3. FLEXNET License Administrator	15
Possible questions/problems	15
FlexNET License Administrator page is not found!	16
FlexNET License Administrator port	18
Vendor Daemon is not RUNNING	19
Step 4. Protection Setup	21
Possible questions/problems	21
How to ping to the server pc	22
How to use telnet to check the connection to the port on the server pc	23
Change the License Server Manager port in use	24

Contacts

<p>Belgium Headquarters</p> <p>SCIA nv Industrieweg 1007 B-3540 Herk-de-Stad Tel: +32 13 55 17 75 E-mail: info@scia.net</p> <p>Support Phone CAE (SCIA Engineer) Tel: +32 13 55 09 90</p> <p>CAD (Allplan) Tel: +32 13 55 09 80</p> <p>Support E-mail: support@scia.net</p>	<p>France</p> <p>SCIA France sarl Centre d'Affaires 29, Grand' Rue FR-59100 Roubaix Tel.: +33 3.28.33.28.67 Fax: +33 3.28.33.28.69 E-mail: france@scia.net</p> <p>Agence commerciale 8, Place des vins de france FR-75012 Paris Tel.: +33 3.28.33.28.67 Fax: +33 3.28.33.28.69 E-mail: france@scia.net</p>
<p>Brazil</p> <p>SCIA do Brasil Software Ltda Rua Dr. Luiz Migliano, 1986 - sala 702 , CEP SP 05711-001 São Paulo Tel.: +55 11 4314-5880 E-mail: brasil@scia.net</p>	<p>USA</p> <p>SCIA North America 7150 Riverwood Drive 21046 Columbia, MD Tel.: +1 443-542-0638 Fax: +1 410-290-8050 E-mail: usa@scia.net</p>
<p>Netherlands</p> <p>SCIA Nederland B.V. Wassenaarweg 40 NL-6843 NW ARNHEM Tel.: +31 26 320 12 30 Fax: +31 26 320 12 39 E-mail: info@scia.net</p>	<p>Switzerland</p> <p>SCIA Swiss Office Dürenbergstrasse 24 CH-3212 Gurmels Tel.: +41 26 341 74 11 Fax: +41 26 341 74 13 E-mail: info@scia.ch</p>
<p>Czech Republic</p> <p>SCIA CZ s.r.o. Praha Evropská 2591/33d 160 00 Praha 6 Tel.: +420 226 205 600 Fax: +420 226 201 673 E-mail: info.praha@scia.cz</p> <p>SCIA CZ s.r.o. Brno Slavickova 827/1a 638 00 Brno Tel.: +420 530 501 570 Fax: +420 226 201 673 E-mail: info.brno@scia.cz</p>	<p>Slovakia</p> <p>SCIA SK s.r.o. Murgašova 1298/16 SK-010 01 Žilina Tel.: +421 415 003 070 Fax: +421 415 003 072 E-mail: info@scia.sk</p>

<p>Austria</p> <p>SCIA Datenservice Ges.m.b.H. Dresdnerstrasse 68/2/6/9 A-1200 WIEN Tel.: +43 1 7433232-11 Fax: +43 1 7433232-20 E-mail: info@scia.at</p> <p>Support Tel.: +43 1 7433232-12 E-mail: support@scia.net</p>	<p>Germany</p> <p>SCIA Software GmbH Technologie Zentrum Dortmund, Emil-Figge-Strasse 76-80 D-44227 Dortmund Tel.: +49 231/9742586 Fax: +49 231/9742587 E-mail: info@scia.de</p>
---	---

All information in this document is subject to modification without prior notice. No part of this manual may be reproduced, stored in a database or retrieval system or published, in any form or in any way, electronically, mechanically, by print, photo print, microfilm or any other means without prior written permission from the publisher. SCIA is not responsible for any direct or indirect damage because of imperfections in the documentation and/or the software.

© Copyright 2016 SCIA nv. All rights reserved.

Document created: 27/05/2016

SCIA Engineer 16.0

Configuring/updating a floating license




This guide is composed for server, student or try-out licenses. If you have a student or try-out license, just follow this side and ignore all mentioning of server and client or USB key. For student or try-out license all these steps are done on the same machine (without USB key).

Step 1 (server): Check if SCIA License Server (FlexNET) is installed

On the machine where you want to load in the licenses, make sure SCIA License Server 2.2.3 (or newer) is installed (under Control Panel → Programs). If necessary, [download SCIA License Server](http://scia.net/en/support/downloads/setup-flexnet-scia-license-server) . (<http://scia.net/en/support/downloads/setup-flexnet-scia-license-server>)

Name	Publisher	Size
Scia Engineer 2013	Nemetschek Scia	1,32 GB
Scia Engineer 2013.1	Nemetschek Scia	1,91 GB
Scia Licence Server	Nemetschek Scia	37,1 MB
Sentinel Protection Inst...	SafeNet, Inc.	5,54 MB

If the SCIA License Server is installed, you will have the next shortcuts in the start menu (see the image on the right).

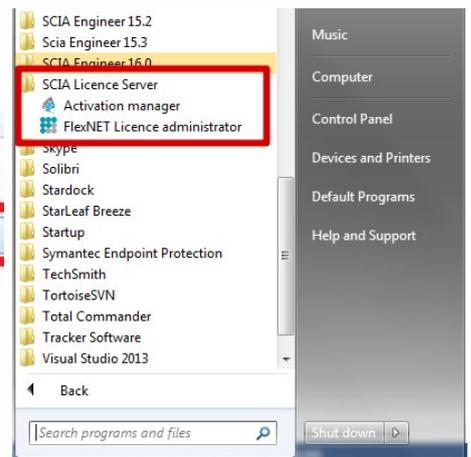


Questions/problems?

→ See the chapter about "Step 1. Installation of SCIA License Server (FlexNET)" on page 9 - SCIA Engineer keeps saying 'license server is outdated'

Step 2 (server): Open the activation manager and activate the license

Open the activation manager on the machine where you want to load in the licenses:

1. Select the license (you can add it through 'Read Licence ID' by selecting the .LID file);
2. Click on 'Return License' (if it's greyed out, then go directly to 'Activate License');
3. Then hit 'Activate Licence' (the circle before the 'Licence ID' number will become green).

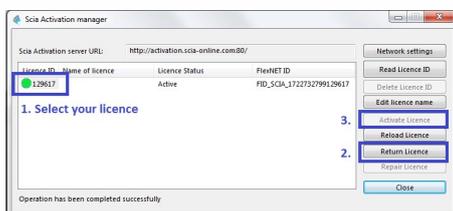

Important: 'Activate license' will not work through remote desktop if you have a USB license key! You must be physically behind the machine (for virtual machines, use the console (mostly vSphere)). (this remark does not apply on student or try-out licenses)

Questions/problems?

- Go to the chapter about "Step 2. Using the Activation manager" on page 10
- Where can I get this lid file?
 - What is 'updating' your license?
 - What are the license statuses?
 - A message appears when I click on 'Activate License'

Step 3 (server): Open FlexNET License Administrator

Open the FlexNET License administrator. See step 1 for the shortcut.


1. Go to 'Administration' (the top right button). The default username and password is admin. If the password is changed (after 1st login), then the new password must be used (username remains 'admin').

Remember the port and host name!

(In this case: port = 27000, host = M4600-Hamza



2. Go to Vendor Daemon Configuration and check if the Status = 'RUNNING'.

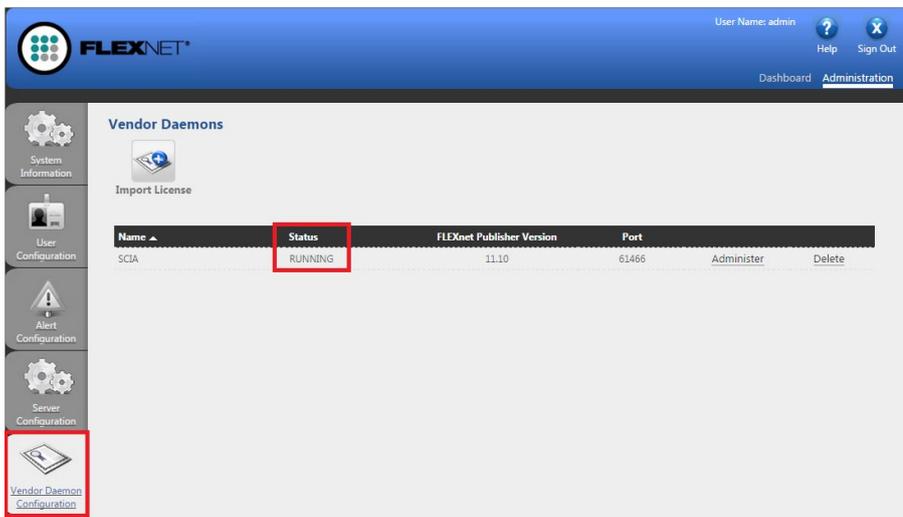


Questions/problems?

- Go to the chapter about "Step 3. FLEXNET License Administrator" on page 15
- What to do if I can't see the FLEXNET page?
- How can I change the port number?
- What to do if my status is not 'RUNNING'?

Step 4 (client): The protection setup

In the next step, we will open the protection setup and find the licenses.

If you have opened the protection setup, you must choose the correct type of license.

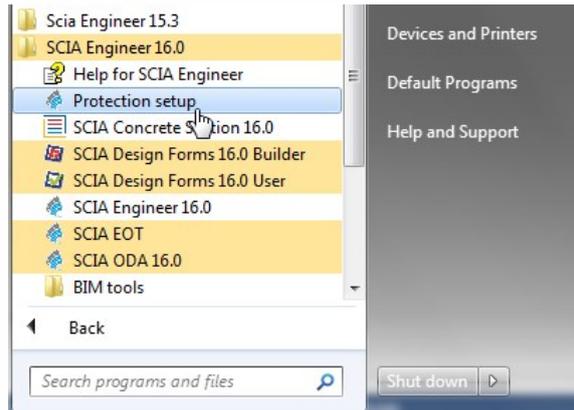

Try-out/test license


- Set the type to Try-out and click 'Apply / Refresh'.
- You can check the licenses by clicking 'Expand'.
- If the box is empty, then set the type to 'Floating' and path = '@localhost'.

Student license

- Set the type to 'Student' and click 'Apply / Refresh'.
- You can check the licenses by clicking 'Expand'.
- If the box is empty, then set the type to 'Floating' and path = '@localhost'.

Official server license

- Set the type to 'Floating' and fill in the path.
- The path is composed like this: 'port @ server'
 - The port number and host name are shown in the 'system information' in step 3.
 - The server name can be either the host name, or the IPv4 Address

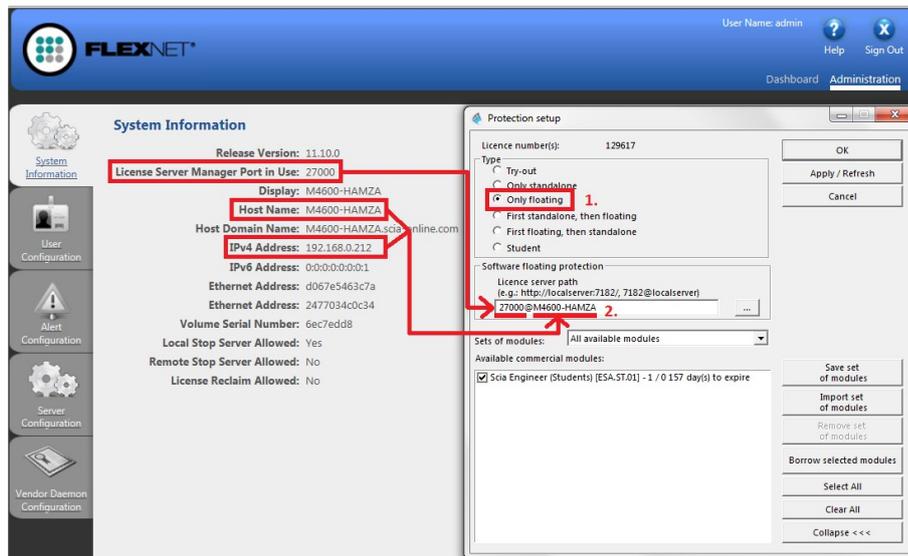

Click on 'Apply / Refresh' and you should see licenses below.

Questions/problems?

- Go to the chapter about "Step 4. Protection Setup" on page 21
- If I hit 'Apply/refresh', the box stays empty...
- How can I see who is using which license?

Now you're done!

.... Unless something went wrong.

In that case, go to the correct chapter indicated under 'Questions/problems' in the step that went wrong...

Step 1. Installation of SCIA License Server (FlexNET)

On the machine where you want to load in the licenses, make sure SCIA License Server 2.2.3 (or newer) is installed (under 'Control Panel → 'Programs').

If necessary, [download SCIA License Server](http://scia.net/en/support/downloads/setup-flexnet-scia-license-server) . (<http://scia.net/en/support/downloads/setup-flexnet-scia-license-server>)

Name	Publisher	Size
Scia Engineer 2013	Nemetschek Scia	1,32 GB
Scia Engineer 2013.1	Nemetschek Scia	1,91 GB
Scia Licence Server	Nemetschek Scia	37,1 MB
Sentinel Protection Inst...	SafeNet, Inc.	5,54 MB

If the SCIA License Server is installed, you will have the next shortcuts in the start menu



Possible problem

→ An error message appears during installation

Try the solution suggested below

→ **SCIA Engineer keeps saying 'License server manager outdated'**

1. It will say this if the installed SCIA License Server is too old (older than v.2.2.0)
2. You must update the SCIA License server by installing the latest version
 - a. Check under 'Control Panel' → 'programs' what the version is
 - b. If the message persists, it will be necessary to stop several services first. For this, use Option 1 in the solution given below and reinstall the setup.

Solution

Try to stop the thing which is blocking the installation to install/update ALL files

Option 1: Stop ladmin.exe and scia.exe and rerun the installation.

1. Hit the Windows 'Start' button and type in 'Services.msc' (+ ENTER)
2. If you can find the services ladmin.exe and/or scia.exe, then stop them both.
3. If you cannot find these services, then go to option 2.



Option 2: Contact SCIA support

- Send the image of the message
- Indicate that you contacted the guide "Updating floating license" (and what you tried)
- Ask for a possible solution

After applying these steps, please proceed with the steps in chapter "Configuring/Updating a floating license" on page 5.



Step 2. Using the Activation manager

If the SCIA License Server is installed, you will have the SCIA Activation manager shortcut in the start menu (image on the right). The shortcut also refers to the following path:

C:\Program Files (x86)\Common Files\SCIA\LicenceServer\ActivationUtility\Activationutility.exe

You can load in the license with these steps:

1. Select the license (you can add it through 'Read Licence ID' by selecting the .LID file);
2. Click on 'Return License' (if it's greyed out, then go directly to 'Activate License');
3. Then hit 'Activate Licence' (the circle before the Licence ID number will become green).

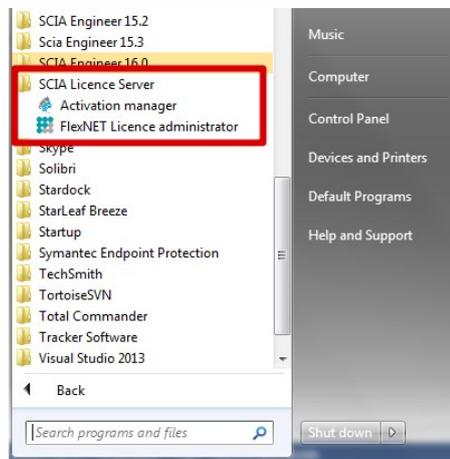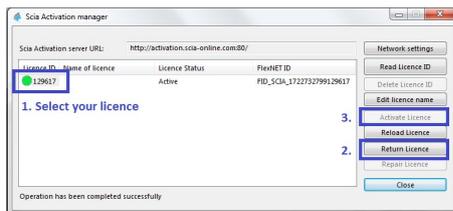

Possible questions / problems

→What if my Activation Manager is empty?

Click on 'Read License ID'

Select the LID file (for the image above, it would be "SCIA6xxxxx.lid")

→Where can I get this LID file?

It was sent to you by SCIA. You can probably find it in your mail box (for student/try-out).

This LID file does not need to be updated (never ever).

→What do I have to do when I have to update my license?

'Updating' your license, is no more than clicking on 'Activate License' again.

(It might be necessary to return the license first (with the button 'Return License'))

→What does the little image before License ID mean (usually that little circle)?

This indicates the status of the license (see also chapter "License status" on the facing page)

It should become green after clicking on 'Activate License'.


→I click on 'Activate License', but I get an some kind of message...

More explanation can be found in the chapter "Messages when using 'Activate license'" on page 12 below.

License status

Blue circle – new license

This means that you just clicked on 'Read License ID' and have not activated the license yet.

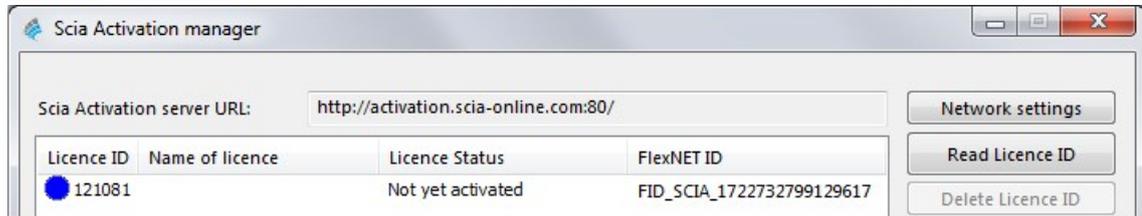


Green circle – working perfectly

This means that the license is currently activated on this machine.



Grey circle – license is returned

The license is not on this machine. It has been returned to SCIA.

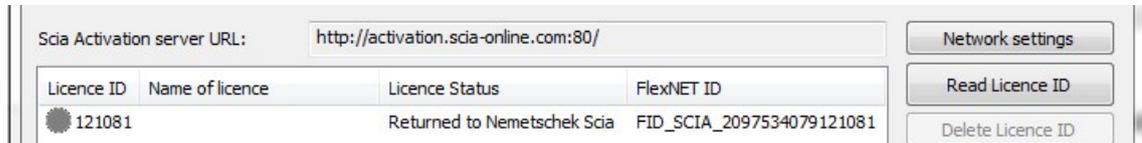

Yellow circle – license must be repaired

This means that something went wrong during 'Return License'. The license was not completely returned. Select the license and click on 'Repair License' to solve the problem.



General:


This occurs when the connection fails during 'Return License'. Use a good internet connection use 'Repair license'.

Server license:

The 'Repair license' button might not be enabled for a server license (number 6xxxxx). Contact SCIA Support and ask them to allow 'Repair license' for this license ID.

Red Question mark – license files on machine are damaged

The license on the machine has been damaged. Something has messed with the trusted storage. Usually it is your anti-virus. Use 'Repair License' to solve this problem.

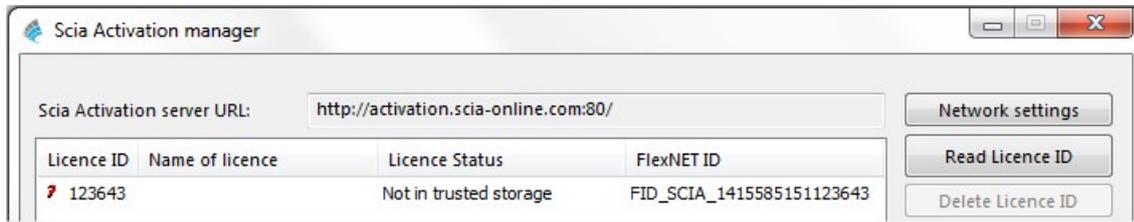

Description:

For some reason, the license has been removed, or altered in the “trusted storage”.

Solution:

1. Add 'C:\ProgramData\FLEXnet' to the exceptions of your anti-virus to prevent this problem from occurring over and over again!
2. Hit the 'Repair License' button to fix this problem.

Remark:


The 'Repair license' button might not be enabled for your license (number 6xxxxx).

Contact SCIA Support, explain the problem (with print-screens) and ask them to allow 'Repair license' for your license key.

Messages when using 'Activate license'

If you click one 'Activate License' in the protection setup, one of the following messages will appear.


Please note ...

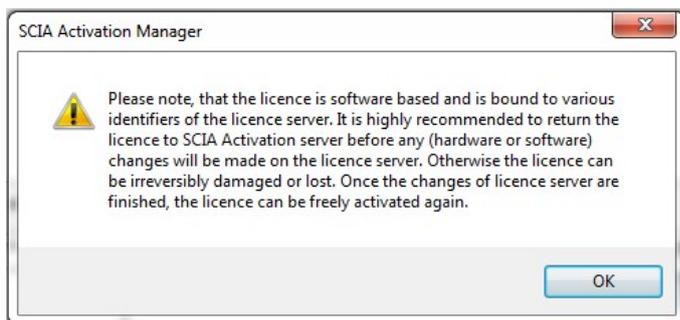

You're safe, this is the message that appears when everything is going perfectly.

The information is nevertheless important to remember!


No internet connection

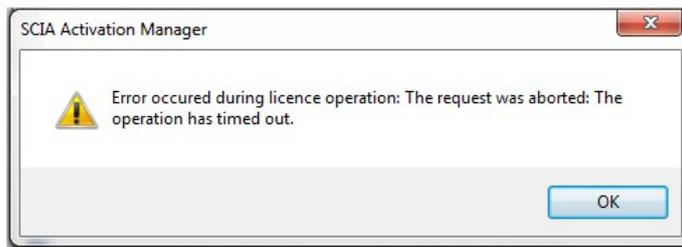

This means the activation manager cannot connect to the license database.

Check if the machine is correctly connected to the internet, and if necessary, check the network settings. Check if Internet Explorer can connect to the internet, because then the activation manager should be able to connect to activation.scia-online.com as well.

No free licenses

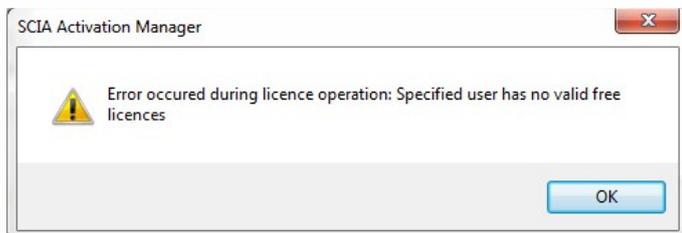


This means the license has already been activated on another machine.

Return the license on the old machine first. Then you can activate the license on this machine.

Student license

You can register for a license again with the same e-mail address (<http://scia.net/en/forms/free-engineering-software-student-license-subscription>). This would make the license available again

Key not found

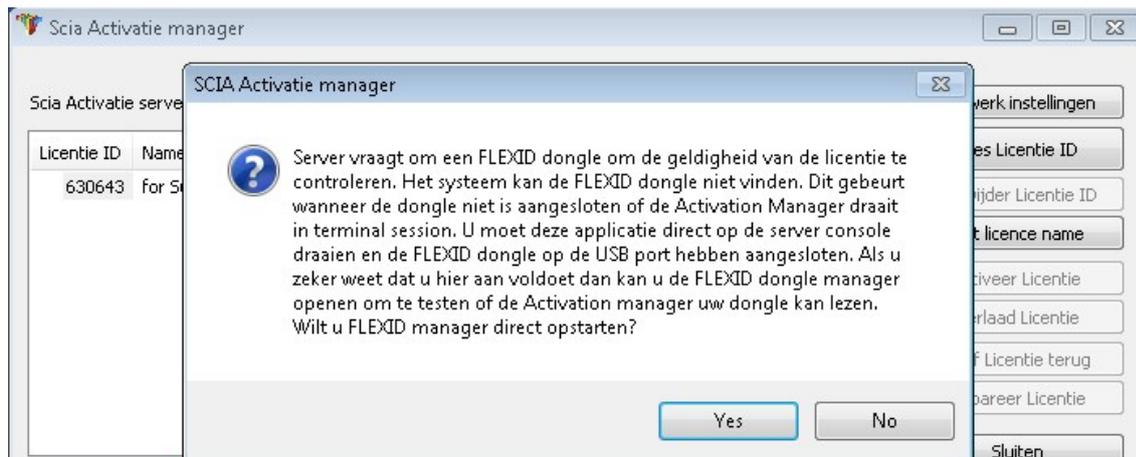

For server licenses, you must be physically behind the machine during activation.

Being connected by remote desktop during activation poses this problem.

For virtual machines, you must go through the console (usually vSphere).

Student license:

You will never encounter this message, since no USB Key is needed for a student license.

Try-out license:

You will never encounter this message, since no USB Key is needed for a try-out license.

FlexNET library error

The message says: "Initialization of FlexNet library failed" and "Operation has been completed with one or more errors".

In this case, go to the list of installed programs, and remove SCIA License Server (FlexNET).

Name	Publisher	Size	Version
Scia Engineer 2013	Nemetschek Scia	1,32 GB	13.0.2030
Scia Engineer 2013.1	Nemetschek Scia	1.91 GB	13.1.1048
Scia Licence Server	Nemetschek Scia	37,1 MB	2.2.3
Sentinel Protection Inst...	SafeNet, Inc.	5,54 MB	7.6.6


Download and install a new setup of SCIA License Server

(<http://scia.net/en/support/downloads/setup-flexnet-scia-license-server>).

Step 3. FLEXNET License Administrator

You log in with the username 'admin' and the password.

- The first time you login, the password is 'admin'
- After the first login, you can change the password, if it has been changed, then the new password must be used

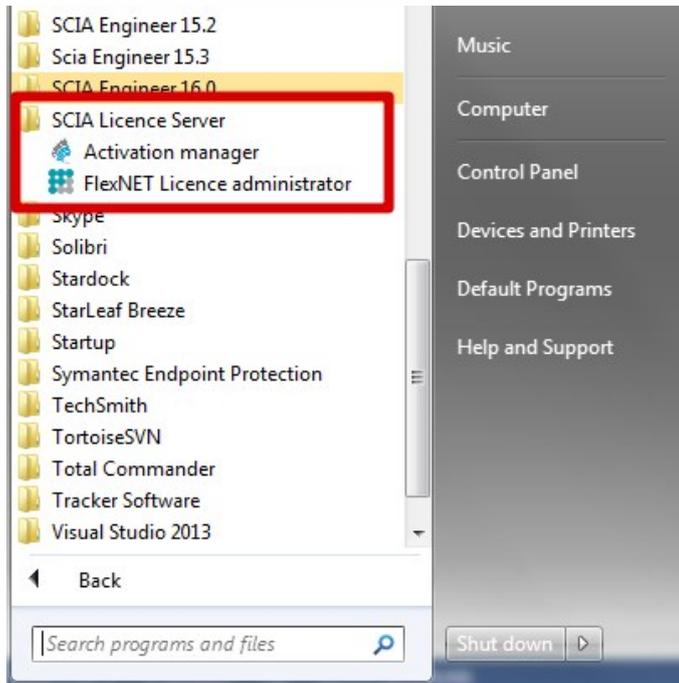

If the SCIA License Server is installed, you will have the FlexNET License administrator shortcut in the start menu (image on the right). The shortcut does no more than opening your browser, and it uses the following address: <http://localhost:8080/>

Possible questions/problems

→I open 'FlexNET license administrator', but it says 'No page found'! What now?

More explanation can be found in chapter "FlexNET License Administrator page is not found!" on the next page

→I lost the password, and now I can't log in...

Try 'admin'... Otherwise, one solution left: Re-install with the setup indicated in "Step 1. Installation of SCIA License Server (FlexNET)" on page 9.

→How can I change the port number (default = 27000) used by the license server?

More explanation can be found in chapter "Vendor Daemon is not RUNNING" on page 19


→What if I don't see 'RUNNING' under the tab 'Vendor Daemon'?

More explanation can be found in chapter "Vendor Daemon is not RUNNING" on page 19

FlexNET License Administrator page is not found!

Description

→ If you open the FlexNET License administrator, then it opens your browser for the page for <http://localhost:8080/>, but this page is not available...

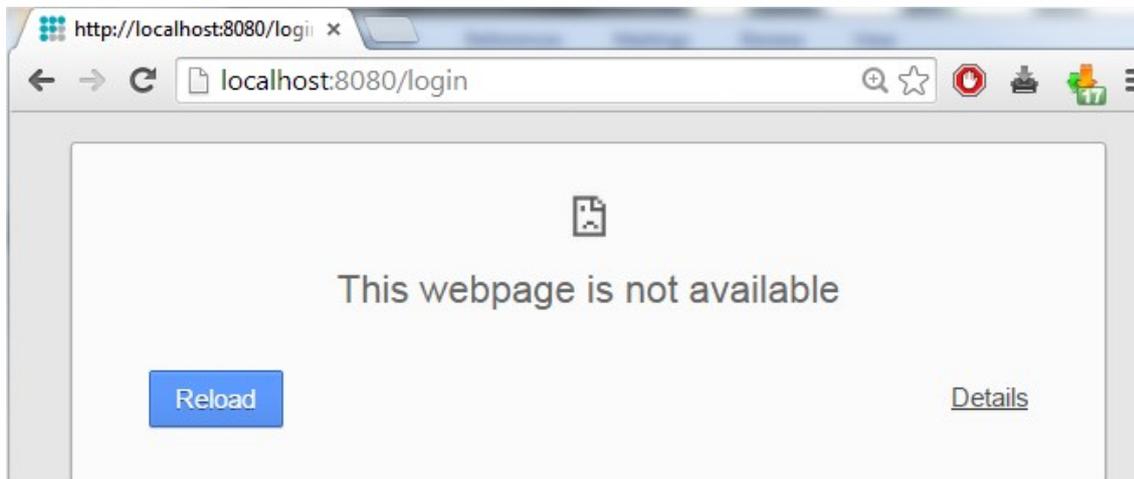

Solution

The service `lmadmin.exe` must be started (in the Windows services)


Option 1: Start 'lmadmin.exe'

1. Hit the Windows 'Start' button and type in 'Services.msc' (+ ENTER)
2. If you can find the service `lmadmin.exe`, then right click on it and choose 'Start'.




Option 2: Disable Data Execution Prevention

1. Hit the Windows Start button and open the Control Panel.
2. This part depends on your control panel setting. Follow either step a, or step b:
 - a. If you have a lot of equally big icons in your control panel, the select 'System'.
 - b. If your control panels is in categories, then chose first 'System and security' and then 'System'
3. In the window that opens, follow the next steps:
 - a. Open the 'Advanced system settings'
 - b. Go to the tab 'Advanced'
 - c. Then to 'Settings' (under performance)

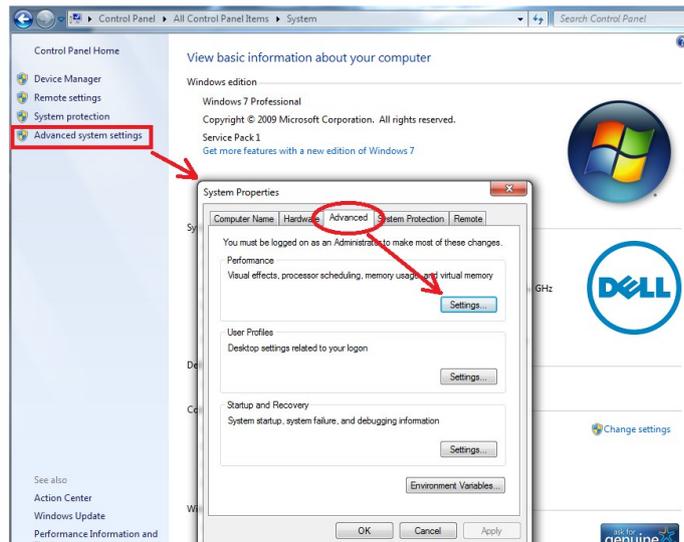

4. In the window that opens, make sure that the tab 'Data Execution Prevention' is set to:

“Turn on DEP for essential Windows programs and services only”

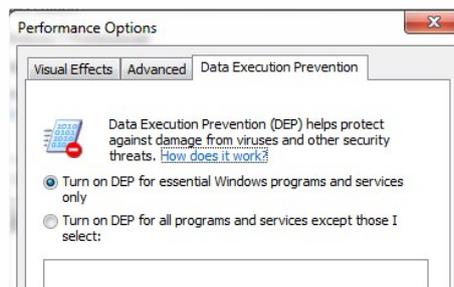

Remark: After changing settings here, the machine must be restarted.

Using option 2 (Turn on DEP for all...) is possible, but with exceptions for:

- lmadm.exe (C:\Program Files (x86)\Common Files\SCIA\LicenceServer\FlexnetServer\lmadm.exe)
- scia.exe (C:\Program Files (x86)\Common Files\SCIA\LicenceServer\FlexnetServer\scia\scia.exe)


Checks

Continue with "Step 3 (server): Open FlexNET License Administrator" on page 6.

FlexNET License Administrator port

Description

→ If you open the FlexNET License administrator, then under 'Administration', it shows you the System Information.



How can you change the port shown here? (in the image it's 27000)




Solution

The port number must be changed and ladmin.exe must be restarted

Step 1: Change the port number in FlexNET license administrator

1. Go to Server configuration
2. Click on the line License Server Configuration
3. Set the port number you want to use
4. Save the settings

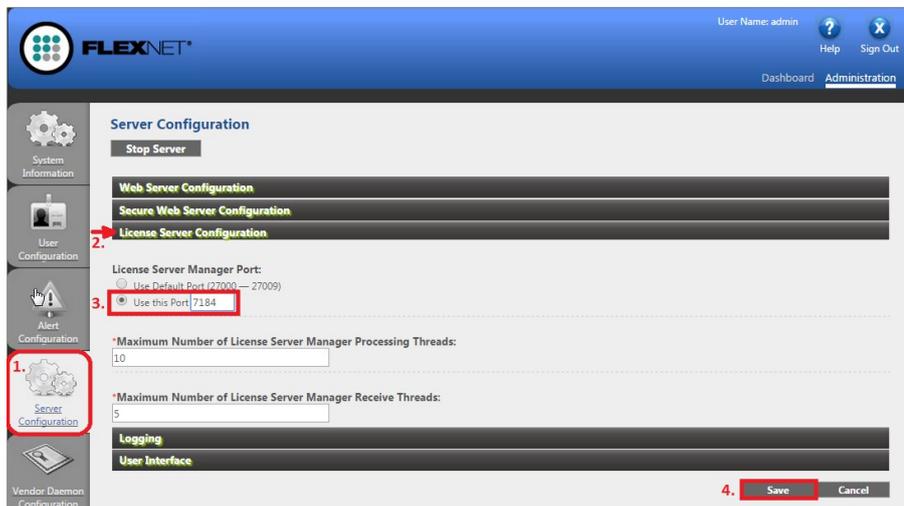

Step 2: Restart FlexNET license administrator

1. Hit the Windows Start button and type in 'Services.msc' (+ ENTER)
2. Find the service ladmin.exe, then right click on it and choose 'Restart'.




Vendor Daemon is not RUNNING

Description

→ You have opened the FlexNET License administrator, and you are checking the tab Vendor Daemon Configuration, but it's not RUNNING!

('Running_pending' is also not equal to 'RUNNING', so that status is also not good)



Name	Status	FLEXnet Publisher Version	Port
SCIA	STOPPED	11.10	Administrator

Solution

The reason it cannot start must be removed!

Option 1: Check your security software

Sometimes the security software (e.g. Anti-virus) blocks the vendor daemon.

1. Deactivate the security software and check if the vendor daemon works.
 - a. If yes: You can turn the security software on, but you must add exceptions to the security software so that it allows the Vendor Daemon to run.
 - b. If no: Then something else is blocking the Vendor Daemon.

Option 2: Disable Data Execution Prevention

The vendor daemon is run by the executable scia.exe. This can also be blocked by Windows.


We refer to chapter "FlexNET License Administrator page is not found!" on page 16, under option 2 it is described how to check and modify this setting.

Option 3: Check LMtools (if it exists on the machine)

LMTools is the predecessor of LMAdmin.



1. Find and open LMTOOLS.
2. Under the tab Config Services, select the service which runs for SCIA Engineer.
3. Uncheck 'Start Server at Power Up' and uncheck 'Use Services'.
4. Save your settings.


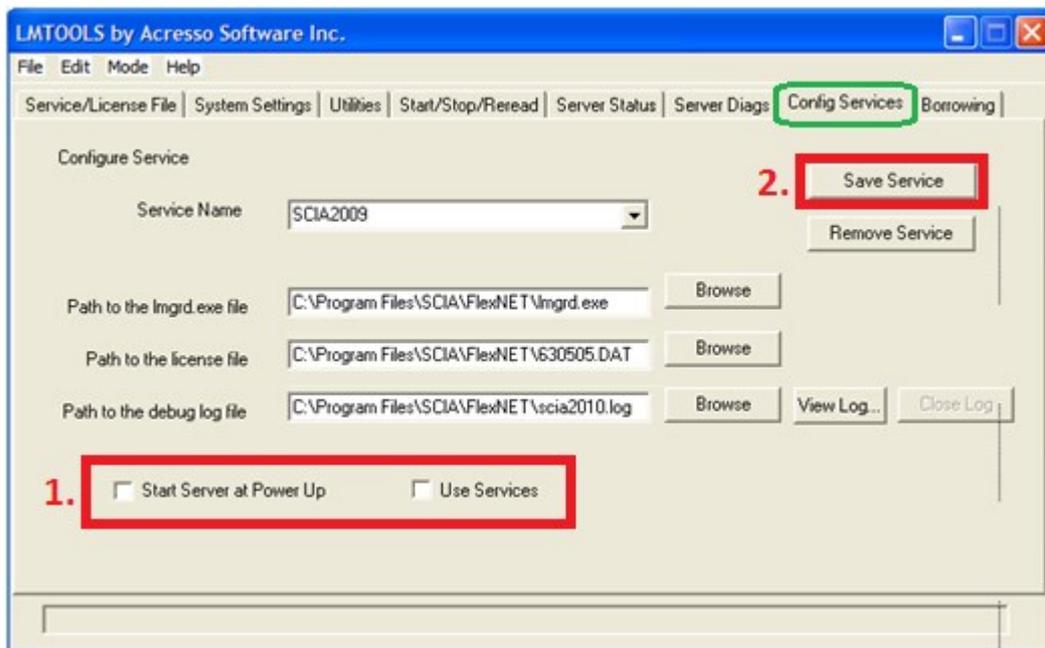


Step 4. Protection Setup

In the next step, we will open the protection setup and find the licenses.

If you have opened the protection setup, you must choose the correct type of license.

If you choose type = floating, then you can make both the student, try- out and server license work. As long as you input the correct path.

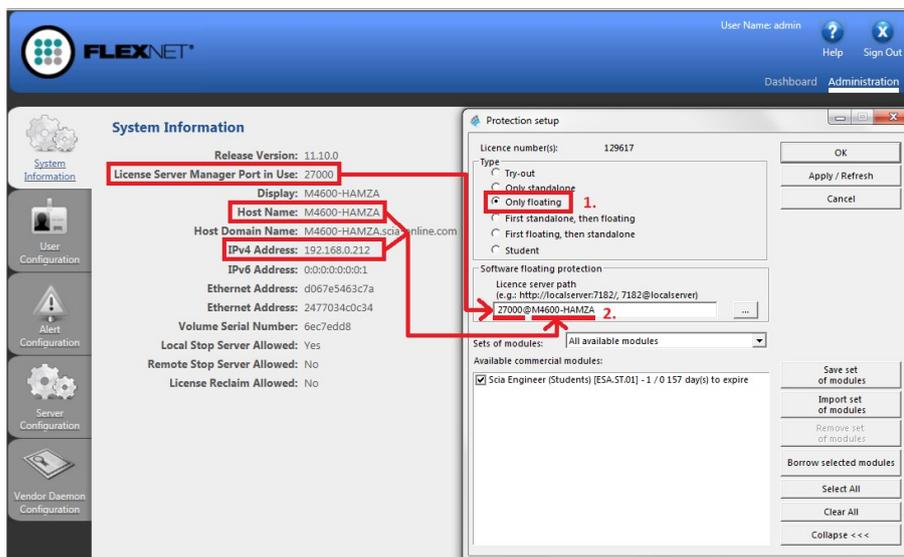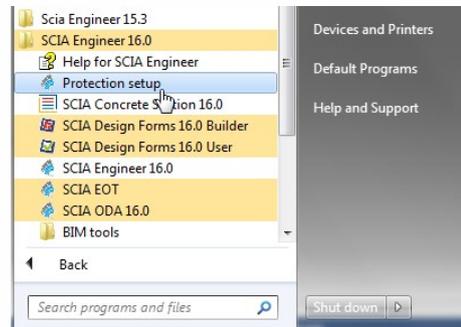

Possible questions/problems

→The box where I should see the licenses is empty! How can this be?

Three possible reasons:

1. The server pc cannot be reached
2. The port on the server pc cannot be reached
3. A different program is already using the port on the server

→How can I test if this pc can reach the server pc?

Ping to the server pc. More explanation can be found in chapter "How to ping to the server pc" on the next page

→How can I test if this pc can reach the correct port on the server pc?

Telnet to the server pc. More explanation can be found in chapter "How to use telnet to check the connection to the port on the server pc" on page 23.

→How can I change the port number (default = 27000) used by the license server?

More explanation can be found in chapter "Change the License Server Manager port in use" on page 24

How to 'ping' to the server pc

Description

→ You want to test if the client pc can get to the server pc.


(If this would not work, it means the connection is not possible due to security measures (like FireWall) or due to the machines not being connected)

Solution


Ping to the server pc.

Option 1: Ping to the server pc

1. Open command (hit the Windows Start button, and type in cmd (+ENTER))

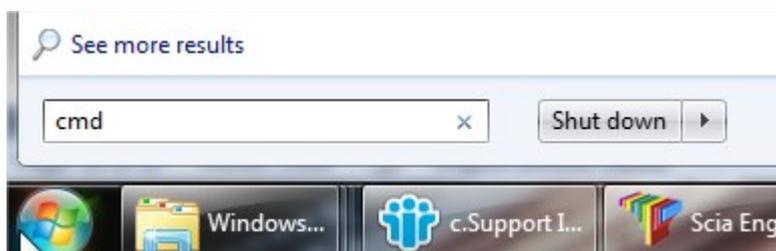

2. Type in 'Ping' followed by the name of the server

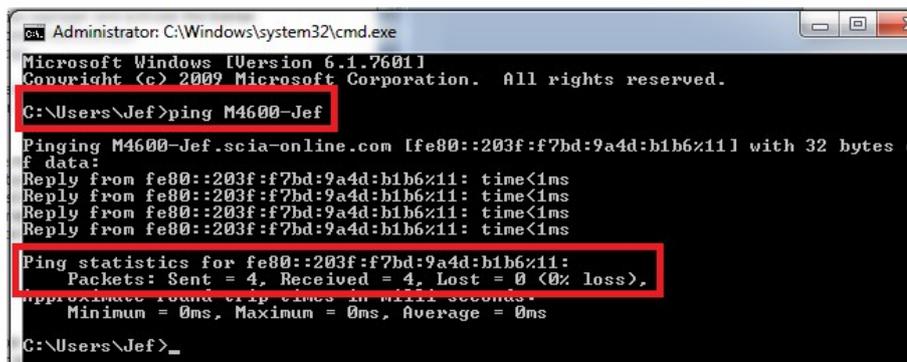

3. If Sent = Received, then this pc can send and receive information with the other pc.

(if it does not work, the connection is blocked or not possible)

How to use 'telnet' to check the connection to the port on the server pc

Description


→ You want to test if the client pc can get to the port on the server pc.

(If this would not work, but Ping works, then the port is blocked by a FireWall)

Solution

Use Telnet to the server pc.

1. Open command (hit the Windows Start button, and type in 'cmd' (+ENTER))
2. Type in 'Telnet' followed by the name of the server and the port number




3. There are 3 possible answers:
 - a. The connection works

If the window becomes black, it means it worked. You are now 'listening' to this port.



- b. The connection does not work

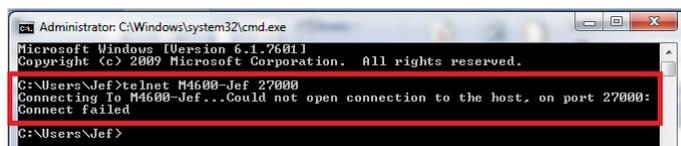

- c. Telnet is not 'activated on your pc'

Activate the 'Telnet client' first, and then repeat this page. <http://www.wikihow.com/Activate-Telnet-in-Windows-7>

Remark: A successful Telnet only means that you can connect to the used port, and that there is a service/program giving information through this port. It does not always mean that this is SCIA.

For example:

Problem: I can telnet to port '27000', but the SCIA license (in the protection setup) does not work

Answer: Another license server is already using port 27000, so change the port for FlexNET license administrator (see chapter "Change the License Server Manager port in use" on the next page)

Change the License Server Manager port in use


Description

→ What if I want to set the License server manager port in use manually?

(for example if there are multiple license servers running on the server)

Solution

1. Open the FlexNET License administrator (by clicking 2x on it's icon).
2. Under 'Server Configuration', input your port at 'Use this port'.
3. Save the settings.

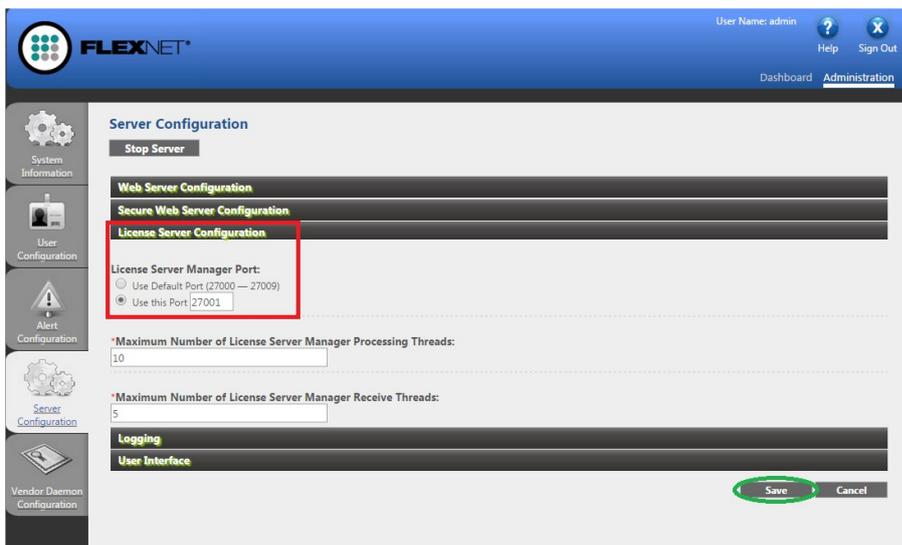

Remark: The service 'ladmin' must be restarted (to take the new port into account.)

1. Run 'Services.msc'
2. Search for 'ladmin.exe'
3. Restart this service.

