SCIAENGINEER



Installation Guide

Updating Standalone Installation

Contacts	3
Step 1: Close all SCIA related software (SCIA Engineer, SCIA Co Section, etc.)	
Step 2: Open the protection setup (through Windows "Start")	6
Step 3: Select 'Import license file'	7
Step 4: Something went wrong	8
System could not find attached SCIA dongle	9
Description	9
Solution	9
Checks	10
System detected an error while loading your license file	10
Description	10
Solutions	10
Checks	12
Could not store license file to the license folder	12
Description	12
Solutions	12
Counter X by license file of counter Y (X>Y)	14
Description	14
Solutions	15
Checks	15
Your license file is not stored on SCIA server	15
Description	15
Solution	15
Checks	15

Contacts

Belgium Headquarters	France
SCIA nv	SCIA France sarl
Industrieweg 1007	Control II A States
B-3540 Herk-de-Stad	Centre d'Affaires
Tel: +32 13 55 17 75	29, Grand' Rue
E-mail: info@scia.net	FR-59100 Roubaix Tel.: +33 3.28.33.28.67
Current Phone	Fax: +33 3.28.33.28.69
Support Phone	· ····
CAE (SCIA Engineer) Tel: +32 13 55 09 90	E-mail: france@scia.net
Tel. +32 13 33 09 90	Agence commerciale
CAD (Allplan)	8, Place des vins de france
Tel: +32 13 55 09 80	FR-75012 Paris
Support E-mail:	Tel.: +33 3.28.33.28.67
support@scia.net	Fax: +33 3.28.33.28.69
	E-mail: france@scia.net
Brazil	USA
SCIA do Brasil Software Ltda	SCIA North America
Rua Dr. Luiz Migliano, 1986 - sala 702 , CEP	7150 Riverwood Drive
SP 05711-001 São Paulo	21046 Columbia, MD
Tel.: +55 11 4314-5880	Tel.; +1 443-542-0638
E-mail: brasil@scia.net	Fax.:+1 410-290-8050
	E-mail: usa@scia.net
Netherlands	Switzerland
SCIA Nederland B.V.	SCIA Swiss Office
Wassenaarweg 40	Dürenbergstrasse 24
NL-6843 NW ARNHEM	CH-3212 Gurmels
Tel.:+31 26 320 12 30	Tel.: +41 26 341 74 11
Fax.: +31 26 320 12 39	Fax: +41 26 341 74 13
E-mail: info@scia.net	E-mail: info@scia.ch
Czech Republic	Slovakia
SCIA CZ s.r.o. Praha	SCIA SK s.r.o.
Evropská 2591/33d	Murgašova 1298/16
160 00 Praha 6	SK-010 01 Žilina
Tel.: +420 226 205 600	Tel.: +421 415 003 070
Fax: +420 226 201 673	Fax: +421 415 003 072
E-mail: info.praha@scia.cz	E-mail: info@scia.sk
SCIA CZ s.r.o. Brno	
Slavickova 827/1a	
638 00 Brno	
Tel.: +420 530 501 570	
Fax: +420 226 201 673	
E-mail: info.brno@scia.cz	

Austria

SCIA Datenservice Ges.m.b.H.

Dresdnerstrasse 68/2/6/9

A-1200 WIEN

Tel.: +43 1 7433232-11 Fax: +43 1 7433232-20 E-mail: info@scia.at

Support

Tel.: +43 1 7433232-12 E-mail: support@scia.net Germany

SCIA Software GmbH

Technologie Zentrum Dortmund, Emil-Figge-Strasse 76-80

D-44227 Dortmund Tel.: +49 231/9742586 Fax: +49 231/9742587

E-mail: info@scia.de

All information in this document is subject to modification without prior notice. No part of this manual may be reproduced, stored in a database or retrieval system or published, in any form or in any way, electronically, mechanically, by print, photo print, microfilm or any other means without prior written permission from the publisher. SCIAis not responsible for any direct or indirect damage because of imperfections in the documentation and/or the software.

© Copyright 2017 SCIA nv. All rights reserved.

Document created: 01/06/2017

SCIA Engineer 17.0

Step 1: Close all SCIA related software (SCIA Engineer, SCIA Concrete Section, etc.)

First close everything related to SCIA software. This can be SCIA Engineer, SCIA Concrete Section, or simply a message about no license being found.


Step 2: Open the protection setup (through Windows "Start")

Open the protection setup for the SCIA software you want to use.

In this case, it is SCIA Engineer 17:



Step 3: Select 'Import license file'

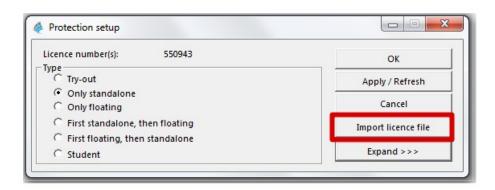




Now you're done!

 \dots Unless you didn't get the last message, but a different one. In that case, go to step 4.


Step 4: Something went wrong...



Go to chapter "System could not find attached SCIA dongle" on the facing page

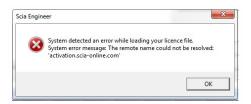


Go to chapter "System detected an error while loading your license file" on page 10

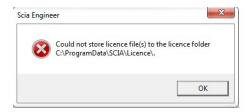

Go to chapter "Could not store license file to the license folder" on page 12



Go to chapter "Counter X by license file of counter Y (X>Y)" on page 14

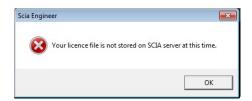


Go to chapter "Your license file is not stored on SCIA server" on page 15

Do you have a different problem? If so, please contact us at support@scia.net with a print screen and a description of the problem.

System could not find attached SCIA dongle


Description

→ The USB license key is not found



Solution

This problem can have 2 different causes.

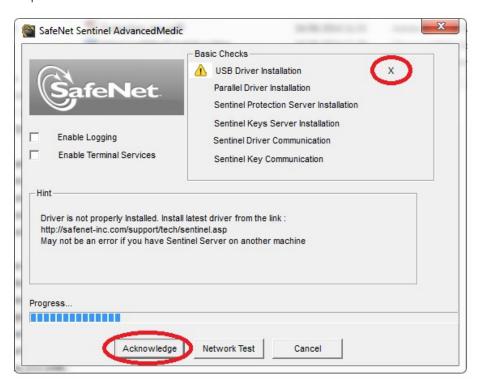

Reason 1: The driver

- Run the Sentinel Advanced Medic (extract and run Sam1.3.1.exe) (http://www.safenet-inc.com/support-downloads/sentinel-drivers/)
- 2. If it does not show at least 7.5.8 behind "USB Driver Installation", then run the Sentinel Protection Installer (http://www.safenet-inc.com/support-downloads/sentinel-drivers/)


Reason 2: The USB key

- 1. Is it connected to the computer, and is the green light visible?
- 2. If no: try again on a different USB port and on a different computer.
- If the light never lights up, then contact the main office for a replacement.
 Replacement is free for customers with maintenance (if it broke down due to normal use) and 75€ (\$80 USD) in other cases. (http://scia.net/en/contact/offices)

Checks

Run the Sentinel Advanced Medic (Sam1.3.1.exe) and all checks should be good.

(http://www.safenet-inc.com/support-downloads/sentinel-drivers/)

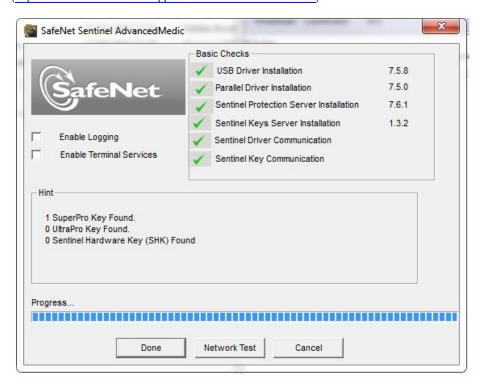

If all checks are good, try step 3 again.

System detected an error while loading your license file

Description

→ The "Protection Setup" could not connect to "activation.scia-online.com".

Solutions

This problem can be solved in 2 different ways.

Option 1: Fix the internet connection.

- 1. Can you browse on the internet
- 2. Is something be blocking the "Protection Setup"? (firewall or anti-virus)
 - → The 'Protection Setup' is a program called Lockman.exe, which is stored in the folder where SCIA Engineer is installed (C:\Program Files (x86)\SCIA\EngineerXX).
 - → Make sure that your firewall or anti-virus does not prevent lockman.exe from connecting to the internet.


Option 2: Manually load the license file.

- → If you click on "Import license file" in the protection setup, you can click "OK" after receiving the error message. Then you will have the possibility to load in the license file manually.
- 1. Make sure you have the license file.

(Send a mail to $\underline{\text{support@scia.net}}, \text{ and indicate the license number on your USB key},$

which is a 6-digit number, starting with a 5. E.g.: 554155)

1. Pick the license file that matches the license number on your USB key.

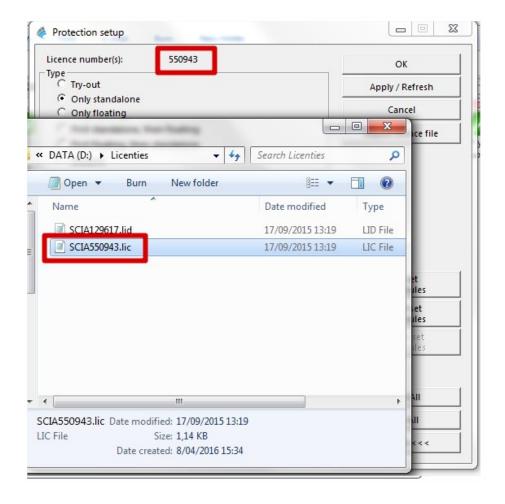



If SCIA support sends you both a .lic and a .e2c file, then always keep these two files together (in the same folder). The .e2c file will be necessary if your licenses contains an edition

Checks

You should receive the next message:




If you do, then you have successfully updated your license.

If you don't, then go to step 4 and check what is going wrong.

Could not store license file to the license folder

Description


→ The "Protection Setup" can't write in the license folder

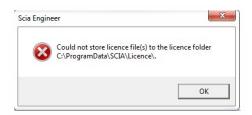

Solutions

This problem can be solved in 2 different ways.


Option 1: Go to the license folder (as shown in the message) and create it if necessary

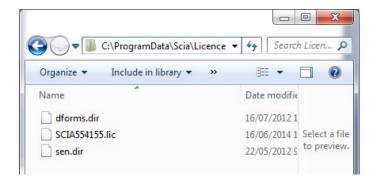

- ${\color{red} \rightarrow} \ {\tt Example: C:\ProgramData\SCIA\Licence\New}$
- → Go to the Properties of this folder


(right mouse button in the white space in the folder)


→ Make sure 'Read-Only' is ticked off.

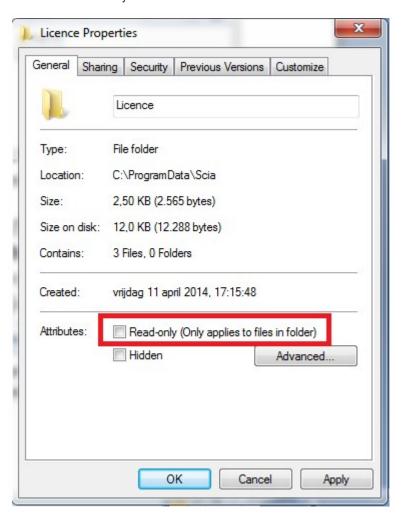

Option 2: Choose a different location to store the license files

- \rightarrow In the "Protection Setup", you must click with the right mouse button, but the mouse icon must be placed on the title bar while clicking the right mouse button
- → In the next window, you can change the path where the license file must be located (see image below on the right).
- ightarrow The new license folder must exist and also NOT be "Read-only".

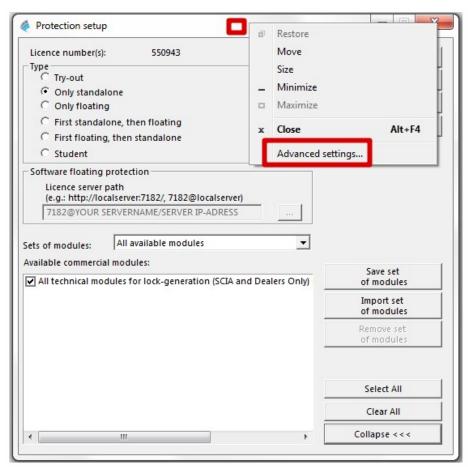

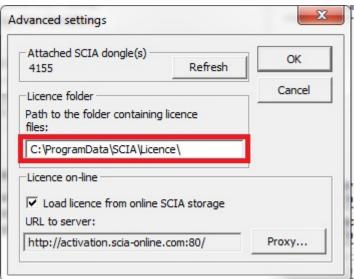

After applying these options, please try to import the license file again.

Counter X by license file of counter Y (X>Y)

Description

→ The license file you are loading is older than the license file on the USB key



Solutions

Get a newer license file by contacting SCIA support.

- → Send the image of the message
- → Ask them to check the license counter (and possibly generate it again)
- → Ask for a new license file

(this is a SCIA5xxxxx.lic file and maybe a SCIA5xxxxx.e2c file)

Checks


Once you receive a response, try to import the license file again

(if you pick a license file manually, then make sure to pick the new one)

Your license file is not stored on SCIA server

Description

→ The "Protection Setup" can't find the license files on the SCIA server.



Solution

The license file must be regenerated by contacting SCIA support (support@scia.net).

→ Send the image of the message and give them your license key number

(on the back of your dongle, 6 digits, starting with '5xxxxx')

- → Ask them to check the license file in the database (and possibly generate it again)
- → Ask for a new license file

(this is a SCIA5xxxxx.lic file and maybe a SCIA5xxxxx.e2c file)

Checks

Once you receive a response, try to import the license file again

(if you pick a license file manually, then make sure to pick the new one)